


**PRZEKŁADNIA:** NMRV-P-063-80B5

## **WIDOK 3D**



## DANE TECHNICZNE

|                                 |                                      |
|---------------------------------|--------------------------------------|
| GR Size                         | 063                                  |
| RAP Ratio                       | 7,5; 10; 15; 20; 25; 30; 40; 50; 60; |
| PAM Input PAM flange            | 80 B5 (200x19)                       |
| ACU Output hole shaft (d)       | Ø25                                  |
| VB Double input shaft           | No                                   |
| TFU Output flange               | No                                   |
| DFU Output flange dimension (d) | -                                    |
| PFU Output flange position      | -                                    |
| AL Output shaft                 | No                                   |
| PAL Output shaft position       | -                                    |
| BR Torque arm                   | No                                   |
| PBR Torque arm position         | -                                    |
| CAP Cover                       | No                                   |
| TIP Motor type                  | No                                   |
| GRA Motor size                  | -                                    |
| RAF Cooling                     | -                                    |
| FC Motor execution              | -                                    |
| TF Break type                   | -                                    |
| AF Brake power supply           | -                                    |
| COP Terminal box cover          | -                                    |
| CVE Fan cover                   | -                                    |
| MOR Terminal box cover position | -                                    |
| A                               | 100                                  |
| AC                              | -                                    |
| B                               | -                                    |
| BB                              | 8                                    |
| BM                              | 6                                    |
| BM1                             | -                                    |
| B1                              | -                                    |
| D                               | 25                                   |
| DM                              | 19                                   |


## DANE TECHNICZNE

|       |          |
|-------|----------|
| DM1   | -        |
| D1 j6 | -        |
| E     | -        |
| F     | M6       |
| FF    | -        |
| G     | 109      |
| G1    | 112      |
| G3    | 75       |
| H     | 72       |
| H1    | 72       |
| I     | 63       |
| K     | 85       |
| KE    | M8*14(8) |
| L     | 103      |
| LB    | -        |
| LL    | -        |
| M     | 95       |
| N     | 80       |
| N1    | 53       |
| O     | 8.5      |
| P     | 110      |
| PM    | 200      |
| PM1   | -        |
| Q     | 80       |
| R     | 107      |
| S     | 8        |
| S1    | 8        |
| T     | 36       |
| TM    | 21.8     |
| TM1   | -        |
| TT    | 28.3     |

## DANE TECHNICZNE

|    |     |
|----|-----|
| T1 | -   |
| V  | 50  |
| W  | 45° |

WIDOK 2D

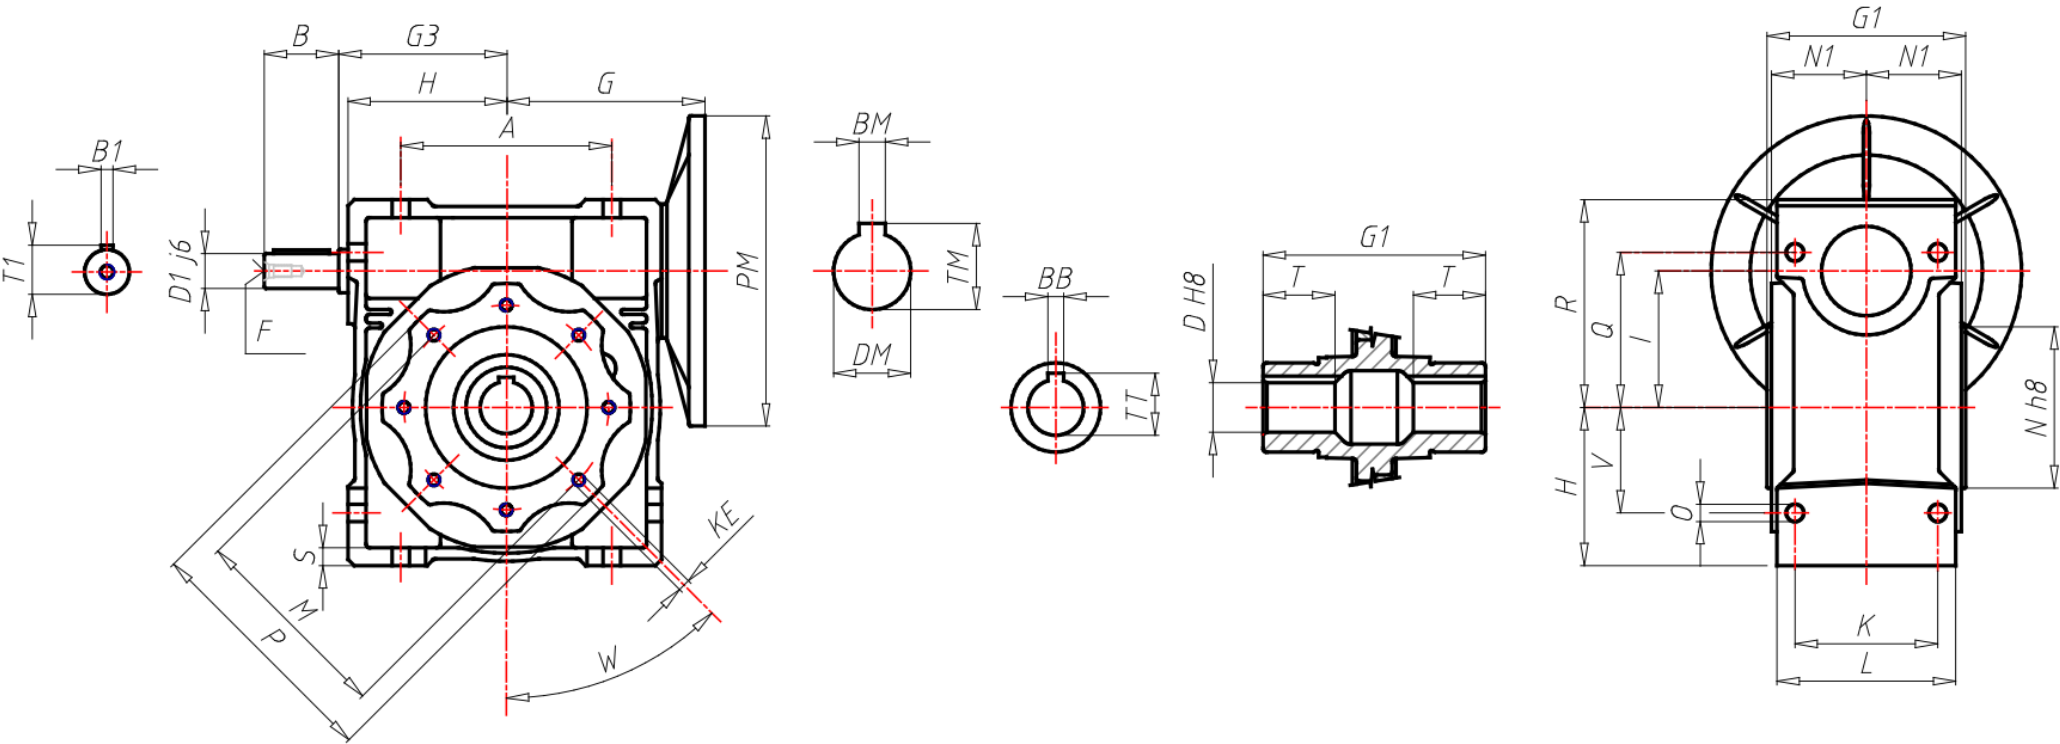

# AKCESORIA

