


MOTOREDUKTOR: NMRV-050-63B5

WIDOK 3D



PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve

PDF DATASHEET

PRODUCT TYPE: NMRV

CONFIGURATION & DIMENSIONAL VALUES

GR Size	050
PAM Input PAM flange	63 B5
ACU Output hole shaft (d)	25
VB Double input shaft	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension (d)	-
PFU Output flange position	-
AL Output hole shaft (d)	NO
PAL Output shaft position	-
BR Torque arm	NO
PBR Torque arm position	-
CAP Cover	NO
TIP Motor type	T-Three phase
GRA Motor size	063
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B5
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Standard
MOR Terminal box cover position	1
A	80
AC	121
B	30
B1	5
BB	8
BM	4
BM1	4
D	25(24)
D1	14

PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve


PDF DATASHEET

PRODUCT TYPE: NMRV

CONFIGURATION & DIMENSIONAL VALUES

DM	11
DM1	11
E	23
F	M6
FF	M4x10
G	80
G1	92
H	60
I	50
K	70
KE	M8x10(8)
L	85
LB	188
LL	211
M	85
N	70
N1	43.5
O	8.5
P	100
PM	140
PM1	140
Q	64
R	84
S	7
T	30
T1	16
TM	12.8
TM1	12.5
TT	28.3(27.3)
V	40
W	45°

2D VIEW PRA

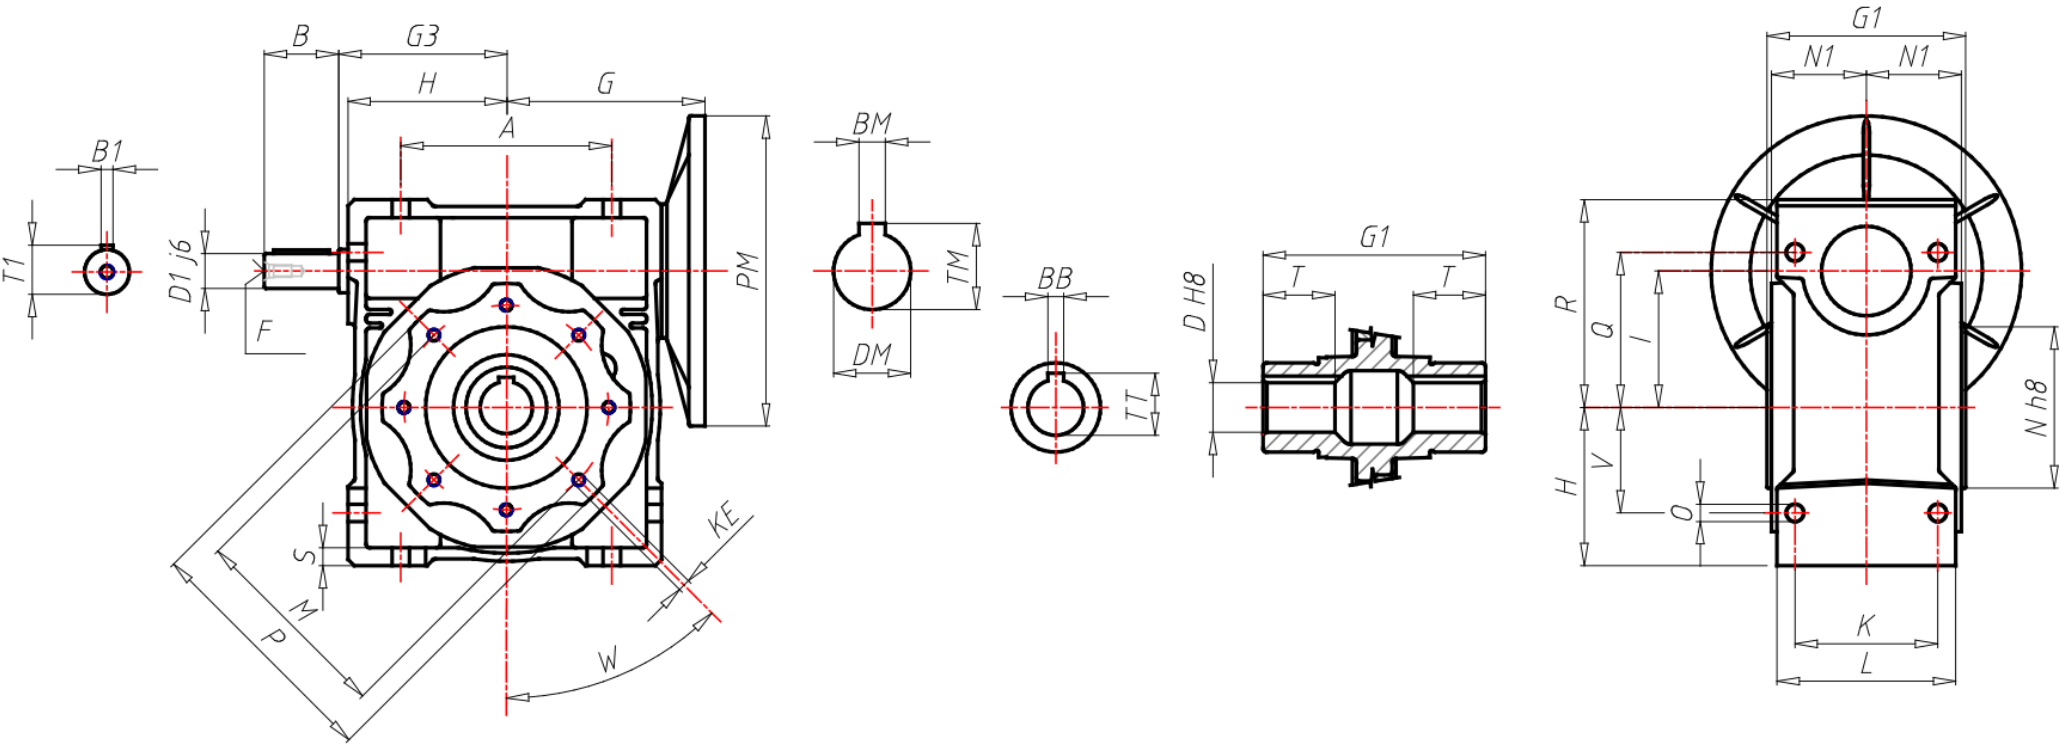

PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve

PDF DATASHEET

PRODUCT TYPE: NMRV

2D VIEW ACCESSORIES

