


MOTOREDUKTOR: NMRV-050-80B14

WIDOK 3D



PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve

PDF DATASHEET

PRODUCT TYPE: NMRV

CONFIGURATION & DIMENSIONAL VALUES

GR Size	050
PAM Input PAM flange	80 B14
ACU Output hole shaft (d)	25
VB Double input shaft	NO
TFU Output flange gear unit 2	NO
DFU Output flange dimension (d)	-
PFU Output flange position	-
AL Output hole shaft (d)	NO
PAL Output shaft position	-
BR Torque arm	NO
PBR Torque arm position	-
CAP Cover	NO
TIP Motor type	T-Three phase
GRA Motor size	080
RAF Cooling	IC411-Self-Ventilated
FC Motor execution	B14
TF Break type	-
AF Brake power supply	-
COP Terminal box cover	Aluminium
CVE Fan cover	Standard
MOR Terminal box cover position	1
A	80
AC	158
B	30
B1	5
BB	8
BM	6
BM1	6
D	25(24)
D1	14

PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve


PDF DATASHEET

PRODUCT TYPE: NMRV

CONFIGURATION & DIMENSIONAL VALUES

DM	19
DM1	19
E	40
F	M6
FF	M6x16
G	80
G1	92
H	60
I	50
K	70
KE	M8x10(8)
L	85
LB	232.5
LL	272.5
M	85
N	70
N1	43.5
O	8.5
P	100
PM	120
PM1	120
Q	64
R	84
S	7
T	30
T1	16
TM	21.8
TM1	21.5
TT	28.3(27.3)
V	40
W	45°

2D VIEW PRA

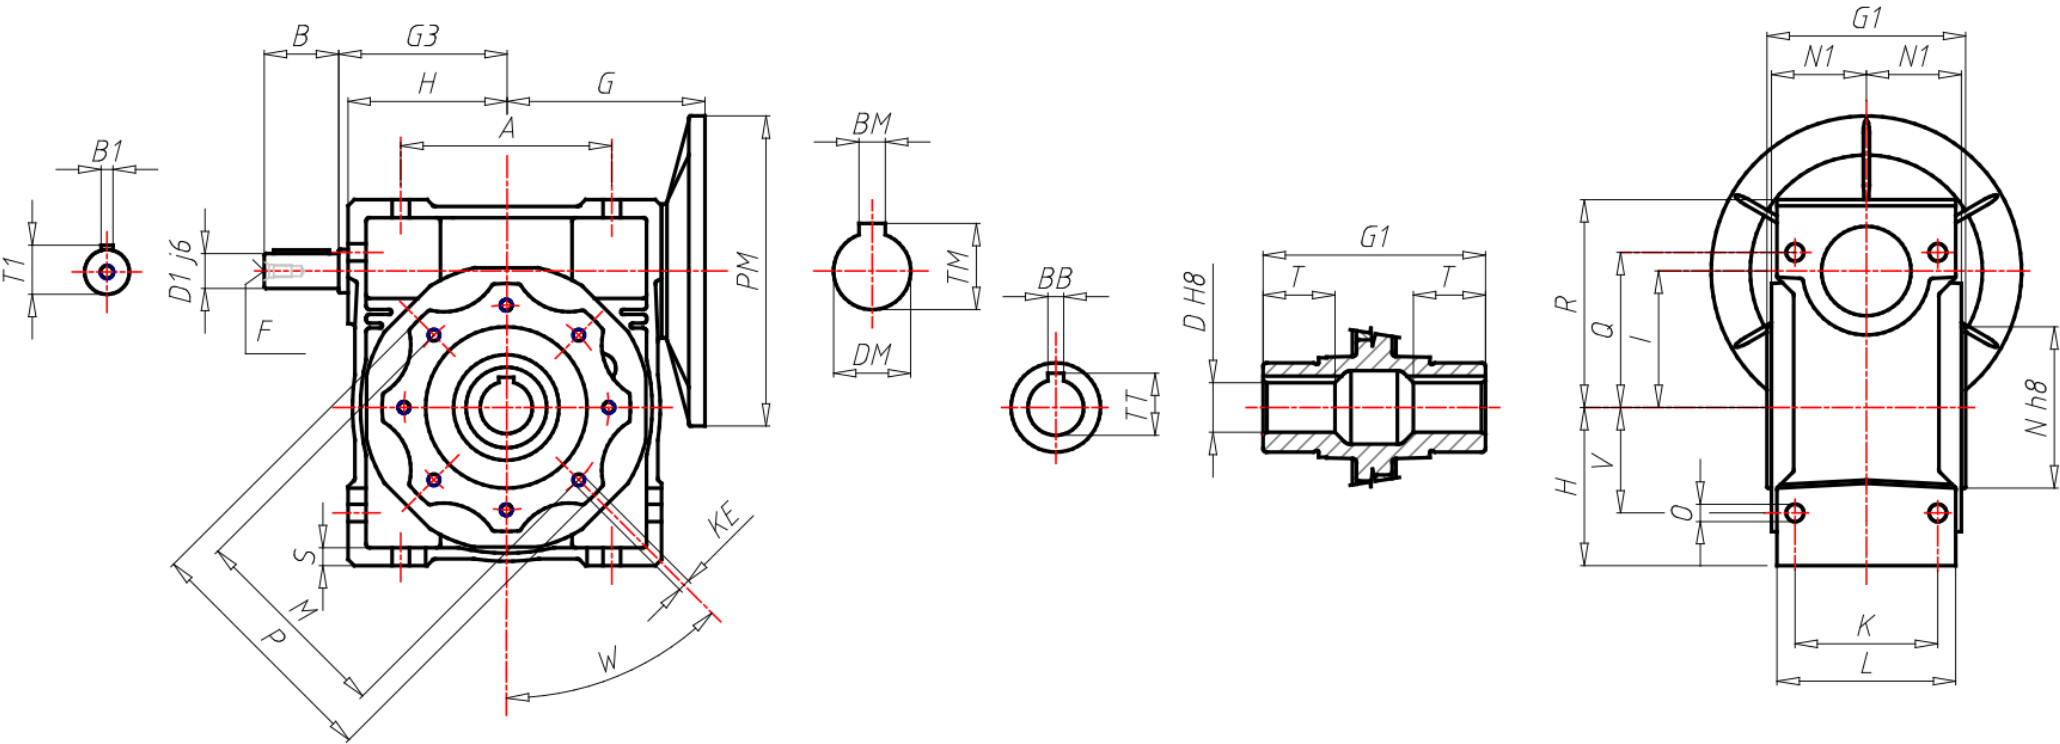

PRODUCT DESCRIPTION:

Worm geared motor fitted for motor coupling
version PAM with sleeve

PDF DATASHEET

PRODUCT TYPE: NMRV

2D VIEW ACCESSORIES

