


[www.motovario.eu](http://www.motovario.eu)

tel. +48 (048) 383-01-44 e-mail: [info@motovario.eu](mailto:info@motovario.eu)

**PDF DATASHEET**

**PRZEKŁADNIA:** SW-050-80B14

**WIDOK 3D**



## DANE TECHNICZNE

|                                 |                             |
|---------------------------------|-----------------------------|
| GR Size                         | 050                         |
| RAP Ratio                       | 5; 7,5; 10; 15; 20; 25; 30; |
| PAM Input PAM flange            | 80 B14                      |
| ACU Output hole shaft (d)       | 25                          |
| VB Double input shaft           | NO                          |
| TFU Output flange               | T                           |
| DFU Output flange dimension (d) | -                           |
| PFU Output flange position      | -                           |
| AL Output hole shaft (d)        | No                          |
| PAL Output shaft position       | -                           |
| BR Torque arm                   | No                          |
| PBR Pos. torque arm             | -                           |
| CAP Cover                       | No                          |
| TIP Motor/Inverter Motor        | No                          |
| GRA Motor size                  | -                           |
| ALI Supply                      | -                           |
| GIRI Speed Range                | -                           |
| POTE Power Group                | -                           |
| CTRL Manual Adjustment Control  | -                           |
| MODU Expansion modules          | -                           |
| RAF Cooling                     | -                           |
| FC Motor execution              | -                           |
| TF Break type                   | -                           |
| AF Brake power supply           | -                           |
| COP Terminal box cover          | -                           |
| CVE Fan cover                   | -                           |
| MOR Pos. terminal box           | -                           |
| A                               | -                           |
| AC                              | -                           |
| A1                              | -                           |
| B                               | 30                          |


## DANE TECHNICZNE

|     |       |
|-----|-------|
| BB  | 8     |
| BM  | 6     |
| BM1 | -     |
| B1  | 5     |
| C   | -     |
| D   | 25    |
| D1  | 14    |
| DM  | 19    |
| DM1 | -     |
| E   | -     |
| EA  | -     |
| EB  | -     |
| EC  | -     |
| F   | -     |
| FF  | M6    |
| F1  | -     |
| GG  | 80    |
| G1  | -     |
| G3  | 64    |
| H   | -     |
| H1  | 52    |
| H2  | -     |
| I   | 50    |
| K   | -     |
| KE  | M8x10 |
| K0  | -     |
| K1  | -     |
| L   | -     |
| L1  | -     |
| LB  | -     |
| LL  | -     |

## DANE TECHNICZNE

|     |      |
|-----|------|
| M   | 85   |
| N   | 70   |
| N1  | 43.5 |
| O   | -    |
| P   | 97.6 |
| PM  | 120  |
| PM1 | -    |
| Q   | -    |
| R   | 84   |
| R1  | -    |
| S   | -    |
| S1  | -    |
| T   | 30   |
| TM  | 21.8 |
| TM1 | -    |
| TT  | 28.3 |
| TT1 | 16   |
| V   | -    |
| W   | 45°  |

WIDOK 2D

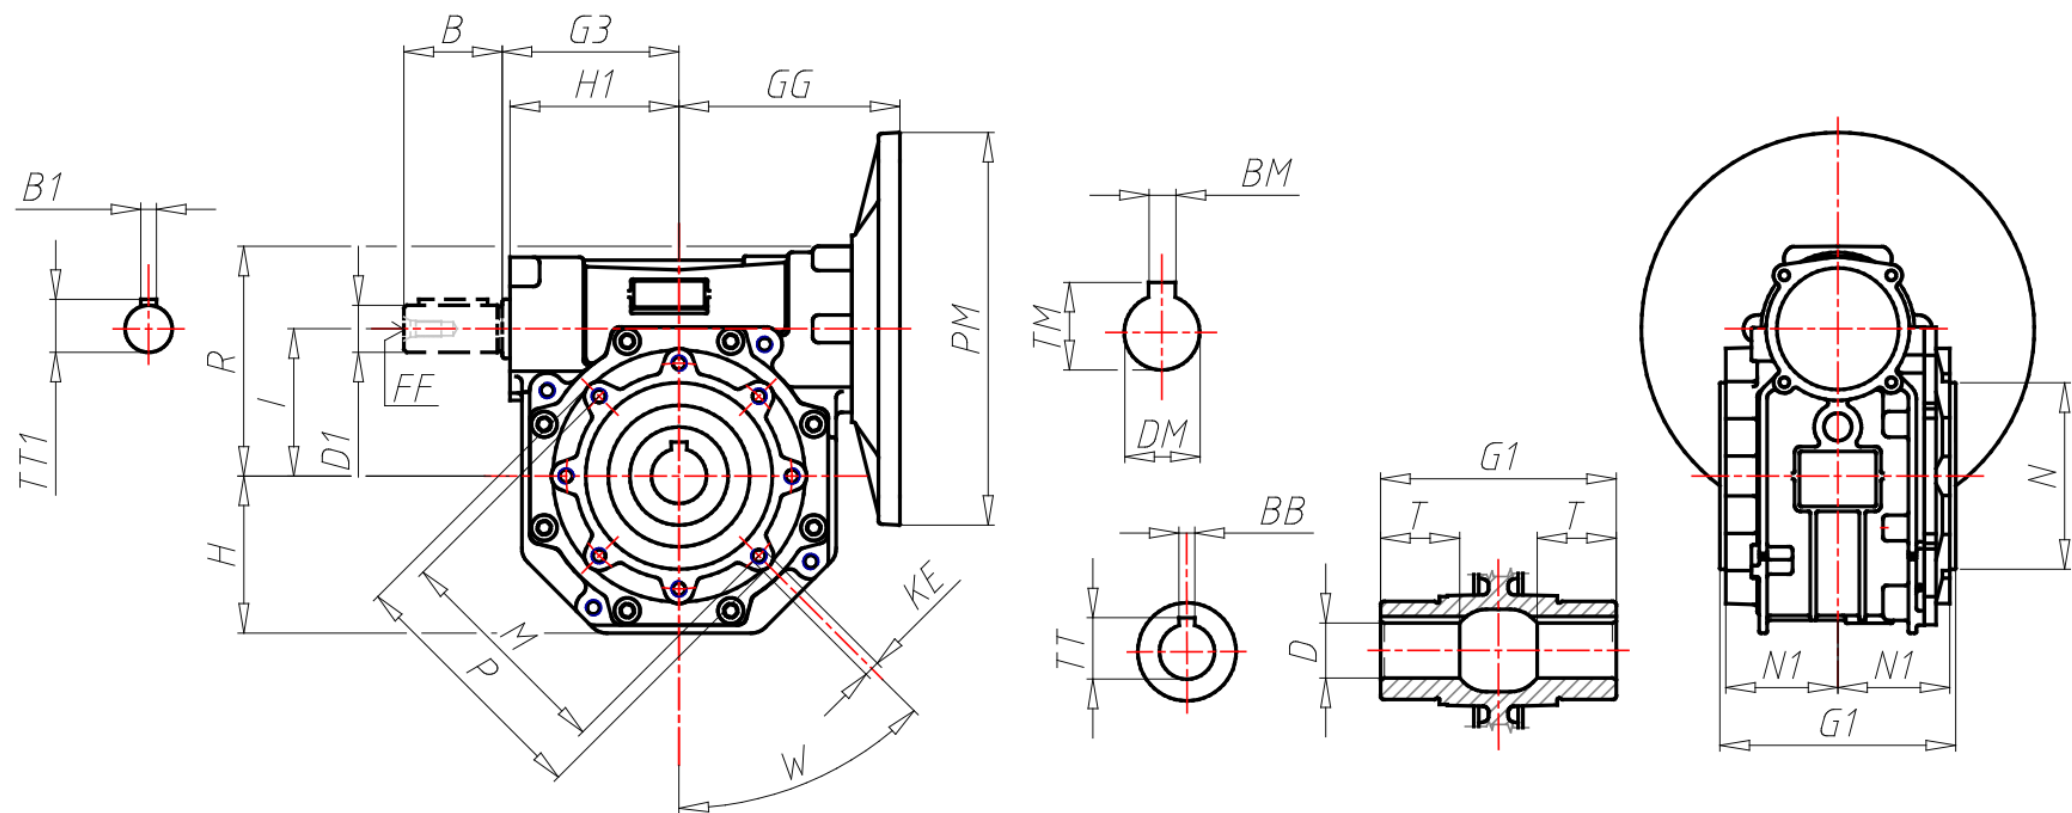

# AKCESORIA

